


# Electron Tubes Limited Data Sheet Bench Top Power Supply Type PM20D



### Output voltage adjustable to 2 kV

- dual polarity
- universal input (mains or dc)
- low output ripple
- overload protection
- low voltage auxiliary dc supplies
- easy to read 3½ digit display
- stackable

### Description

The PM20D bench top power supply provides a stable well regulated output controllable from 20 V to 2000 V. It has been designed primarily for photomultipliers with the particular needs of the laboratory or research specialist in mind. The polarity is determined by selecting either the positive or negative output SHV socket mounted on the rear of the unit. The dual socket output guards against accidental polarity reversal. The unit offers additional safety features such as protection against overload, flashover and short circuit. Every unit is supplied with a set of mating connectors.

### Electrical

Input :	85-264 Vac 47-440 Hz 120-370 Vdc(+or-)
Output Voltage :	20-2000 V
Output Current :	1 mA max
Polarity :	Selectable via back panel
Load Regulation :	15 ppm
HF Ripple :	1m Vp-p typ
LF Noise :	5m Vp-p typ
Temperature Coefficient :	<50 ppm/°C

### Stability

Short Term :	<15 ppm/15 mins
Long Term :	<50 ppm/8 hrs

### Temperature

Operating Range :	0 to +40 °C
Storage :	-5 to +70 °C

### Input

IEC 3-pin lead of 2 m, unterminated.

### Auxiliary Output

+5 V	≤1 A
-5 V	≤0.25 A
+12 V	≤0.25 A
-12 V	≤0.25 A

### Voltage & Current Monitor

Voltage Monitor : Front Panel Display  
Current Monitor : Back Panel 4 mm terminals 1 V = 1 mA

### Voltage Control

Front panel continuous control via a five turn potentiometer with lockable dial.

### Weight


1.3 Kg

### Resolution

Resetability ±1 V



### External Dimensions (mm)

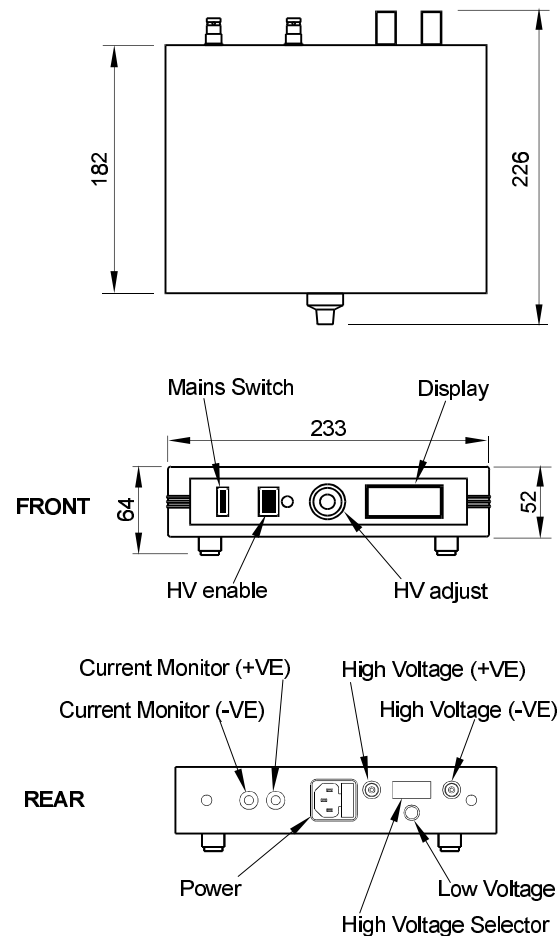

Electron Tubes Limited Bury Street Ruislip Middlesex HA4 7TA England  
tel: 01895 630771 fax: 01895 635953 e-mail: sales@electron-tubes.co.uk  
Electron Tubes Inc 100 Forge Way Unit F Rockaway NJ 07866 USA  
tel: (973) 586 9594 fax: (973) 586 9771 toll free: 1-800 521 8382 e-mail: phototubes@aol.com

The company reserves the right to modify these designs and specifications without notice. Developmental devices are intended for evaluation and no obligation is assumed for future manufacture. While every effort is made to ensure accuracy of published information the company cannot be held responsible for errors or consequences arising therefrom.

© Electron Tubes Limited, 1999

**ISO 9001**  
registered

DS\_PM20D Issue B  
14 September 99